

EXHIBIT 'H'



PRE-CONSTRUCTION RFI LOG

PROJECT	Southwest Elementary School (Package 2)					
OWNER	YES Prep Public Schools					
ARCHITECT	Element Architects					
JOB #	22-752					
DATE	02/23/23				Updated:	3/3/23
					Updated:	3/6/23

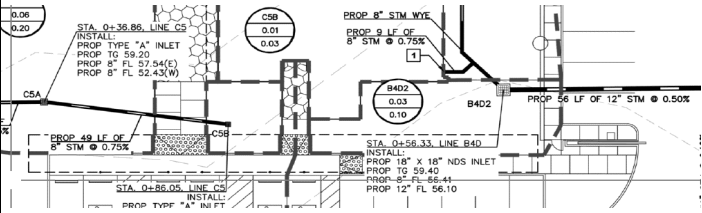
No.	Discipline	Description	Drawing Sheet	Specification Section	Date Submitted	Response Date	Response
A	GENERAL						
B	CIVIL						
1	Storm Sewer	Storm Sewer line between MH B3 on C3.1 to South Calls for 462 LF of Storm Sewer and the same line also has notation of 153 LF and 492 Linear feet of 30" Storm line to Type A Inlet B4 on Page 3.2. These lengths do not match when scaled with the drawings. Please confirm pipe lengths.	C.3.1, C3.2	DIV 33	03/06/23		
2	Storm Sewer	Please provide size and length of storm line between inlet C4 on C3.1 and inlet C5 on C3.2	C.3.1, C3.2	DIV 33	03/06/23		
3	Storm Sewer	As per detail 5/A305 canopy downspouts connect to storm line. Whereas the civil drawings do not show any canopy connections leading to storm line. Please provide details, pipe routing and size. 	A305, C3.03	DIV 33	03/06/23		
C	STRUCTURAL						
D	ARCHITECTURAL SITE						
E	ARCHITECTURE						

EXHIBIT 'H'

No.	Discipline	Description	Drawing Sheet	Specification Section	Date Submitted	Response Date	Response
1	Fireproofing	Subcontractor Question: Please refer to sheet A.005B. On this sheet UL design N502 is provided which calls for fire-rated gyp board protection of the floor beams and SFRM (sprayed fireproofing) protection of the floor decking. The RCP's do not call out this UL design #. Can you let me know exactly where this occurs on the drawings?	A005B	N/A	02/23/23	03/01/23	Refer to 2/A304 and 4/A304. This UL assembly only occurs at the elevator shaft enclosure. This was a COH comment
2	Flagpoles	Subcontractor Question: I did not see any flagpole specifications in the spec book. AS.100 notes out a "flagpole" but no other information. Will further information be forthcoming for that item?	AS.100	N/A	02/23/23	03/01/23	Spec section 10 35 00 - Aluminum Flagpole has been added to addendum#1
3	Tiling	Subcontractor Question: can you verify if the owner /.architects wants chemical -resistant epoxy as the thin-set ? Very expensive as compared to LATEX MODIFIED CEMENT THIN-SET?Thanksagain for your help !	AF Sheets	09 30 00	03/03/23	03/06/23	Use latex modified cement thin-set
4	Glazing	Subcontractor Question: Is this project a hurricane impact glass or non impact?	N/A	08 80 00	03/06/23		
F	FIRE PROTECTION						
G	PLUMBING						
H	MECHANICAL						
I	ELECTRICAL						
J	FIRE ALARM SYSTEM						
K	TECHNOLOGY						
1	Security	Subcontractor Question: I did not see any specs pertaining to Access Control, Intercom/ PA, CCTV, or intrusion on this project. Will these scopes be OFOI or released in future addendums?	N/A	N/A	02/27/23	03/06/23	It is OFOI. Register with www.yesprep.org/rfps for updates
KA	EMERGENCY RESPONDER RADIO ANTENNA SYSTEM						
L	LANDSCAPING & IRRIGATION						